



FOX.50

iotaLAMP



IP66



IK09



CREE XP-G



RECYCLE



FAILURE RATE
< 0,1% after 25,000h



LIFE TIME
Tested over 50,000h



MIN -20°C
MAX 55°C



CLASE I



CIRCULAR PROJECTORS
FOX SERIES

References

| Code | Type | Finish | Light Color | Power | Lense | Voltage | Driver | |
|--------------------------|-------------|-------------------|--------------|-------|-------------|-----------------|-----------------|-------------|
| VL-F50 | A Base | LG Light grey | White | | | | | |
| | B Base 2 | DK Dark grey | W24 2400K | 190W | 1,5° (190W) | 2° | UNIV 100-264Vac | STD ON/OFF |
| | | WH White | W27 2700K | 300W | 4,5° | 8° | | 010 0-10V |
| | | BK Black | W30 3000K | 360W | 12° | 20° | | DALI |
| | | RAL Any RAL color | W40 4000K | | 30° | 40° | | CAS Casambi |
| | | | W60 6000K | | 60° | 5x20° | | |
| 10x70° | | | | | | | | |
| Single Color (SC) | | | | | | | | |
| | R Red | | 360W | 4,5° | 8° | UNIV 100-264Vac | STD ON/OFF | |
| | B Blue | | | 12° | 20° | | 010 0-10V | |
| | G Green | | | 30° | 40° | | DALI | |
| | A Amber | | | 60° | 5x20° | | CAS Casambi | |
| 10x70° | | | | | | | | |
| RGBW | | | | | | | | |
| | RGBW3 | | 300W | 8° | 15° | UNIV 100-264Vac | DALI | |
| | 4 in 1 Chip | | 360W | 20° | 30° | | DMX | |
| | RGB+W3000K | | | 60° | 15x60° | | CAS Casambi | |
| RGBW4 | | | | | | | | |
| | 4 in 1 Chip | | | | | | | |
| | RGB+W4000K | | | | | | | |
| RGBW7 | | | | | | | | |
| | 7 in 1 Chip | | | | | | | |
| | RGBWCLA | | | | | | | |

Reference example

VL-F50-B-BK-RGB7-36W-8°-UNIV-DMX

Variations





A
Base





B
Base 2

Dimensions

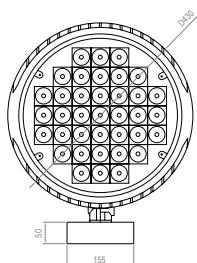


TYPE A

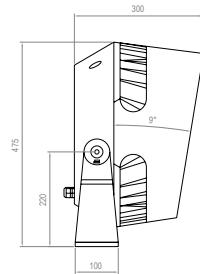

TYPE B

Accessories

| Code | Accessories |
|--------|---|
| VL-F50 | HC Honeycomb Grid MSH Mesh |

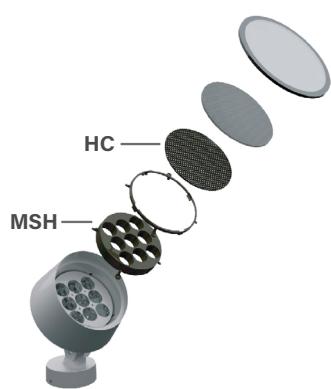

| Code | Accessories |
|--------|-------------------------------------|
| VL-F50 | * CBLX Special length cable* |

* Instead of X, put length of cable needed
Example: VL-F50-CBL-10m